

Club Seat Belt Fitting Kit - MGB/C Roadster Pre 1977

The seatbelt mounting brackets supplied are identical to those supplied for the 1977 onwards MGB models, which had the distinct advantage of placing the belts in a correct location for both safety and ease of operation without fouling the hood when folded down.

Contents:


1 x LH Seat belt bracket4x 5/8" AF shakeproof washers1 x RH Seat belt bracket2x 5/8" split washers2 x 5/8" AF x 1 1/4" bolts2x 2" square re-inforcement plates2 x 5/8" AF Nyloc Nuts2x Distance spacers


WARNING - Check that your inner wheel arches are free from rust and corrosion before fitting. If in doubt consult your local garage or MOT station and carry out any repairs necessary BEFORE fitting the seat belt brackets.

Fitting Instructions: - Please read completely before starting the fitting procedure.

- Starting at the off side (drivers side) and using the template supplied, mark onto the vertical face of each inner wheel arch where the hole needs to be drilled. The carpet and rear cockpit panel should remain in place to give correct dimensions
- 2. Jack up the rear of the car and remove the wheel on the side you are working
- 3. Now drill a ½" hole through the wheel arch from the inside of the car, using the point already marked with the template
- 4. Assemble the bracket into position in the following order
 - a. Split washer onto the bolt
 - b. Bolt through the bracket
 - c. Shakeproof washer onto the bolt
 - d. Spacer onto the bolt
 - e. Shakeproof washer onto the bolt
 - f. Bolt through the wheel arch
 - g. 2" square re-inforcement plate onto the bolt inside the wheel arch
 - h. Nyloc nut onto the end of the bolt
 - i. Check horizontal positioning of the bracket then tighten to 40lb.ft.
 - j. Grease lightly over the bolt and re-inforcement plate inside the wheel arch to help prevent corrosion and aid disassembly
- 5. Replace the road wheel and repeat the procedure on the other side. The diagrams and photo below should help in the assembly and positioning of the brackets.

If you require further technical advice please call us on (01954) 230928

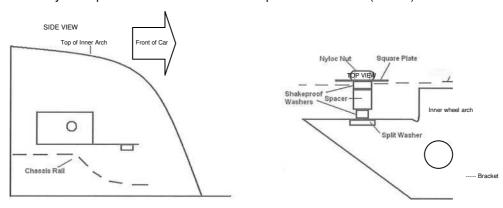

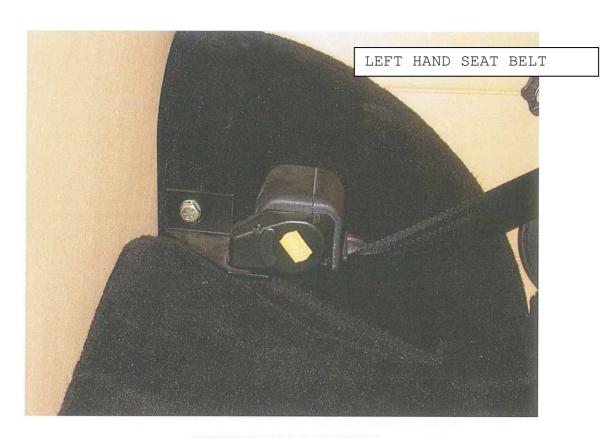

RIGHT HAND SEAT BELT



