

MGB V8 Badge Plinth Instructions

Part Number : HZA4701 PL

Suitable for : MGB V8 - Honeycomb/Mesh Grilles & Body

Kit Contents:

- "V8" Badge Plinth x1
- Screw x2
- Plastic Washer x2
- Metal Washer x2
- Spacer x2 (Do not use for Honeycomb grilles)




Form the thread

Before attempting to install the badge plinth onto your car, you will need to form the thread into the rear of the badge plinth using the supplied screws.

1. Take a small piece of tape and mark on the screw your maximum depth.

2. Ensuring the screw is vertically aligned with the hole, use a Pozi 2 screwdriver to screw down to your mark. Repeat on both holes.

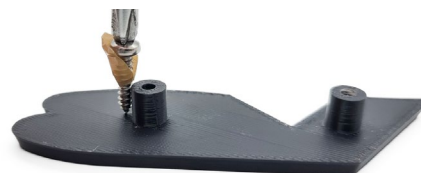

Mesh Grille

Honeycomb Grille

Fit the Plinth

Prior to installation, open your bonnet and remove any old badge hardware. This is also a good opportunity to clean the area.



1. Fit the spacers over the prongs on the rear of the badge plinth. **NOTE: Spacers are not required for use on Honeycomb grilles**

2. Place a screw through a metal washer and then a plastic washer, as displayed in the image.

3. With one hand, align the badge plinth in your desired location, ensuring the screw holes line up with holes on your grille.

4. With your free hand, take your assembled screw and washers to carefully hand tighten from the rear of the grille into one of the badge plinth prongs. Repeat steps 2-4 for the other prong.

5. Once loosely in position, use a short Pozi 2 screwdriver or ratchet, to tighten up the two screws.

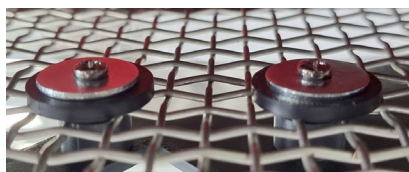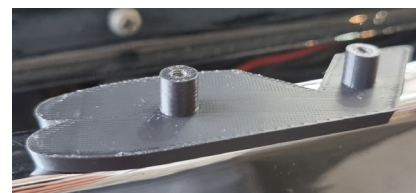

Apply V8 Badge

Not supplied within the kit, please see HZA4701 self adhesive "V8" Badge.